


After installation, key switch must not engage starter in "START" position with transmission in gear or PTO lever engaged or both.



NOTE: This seat switch wire to be wrapped around the positive battery cable and secured with cable tie.

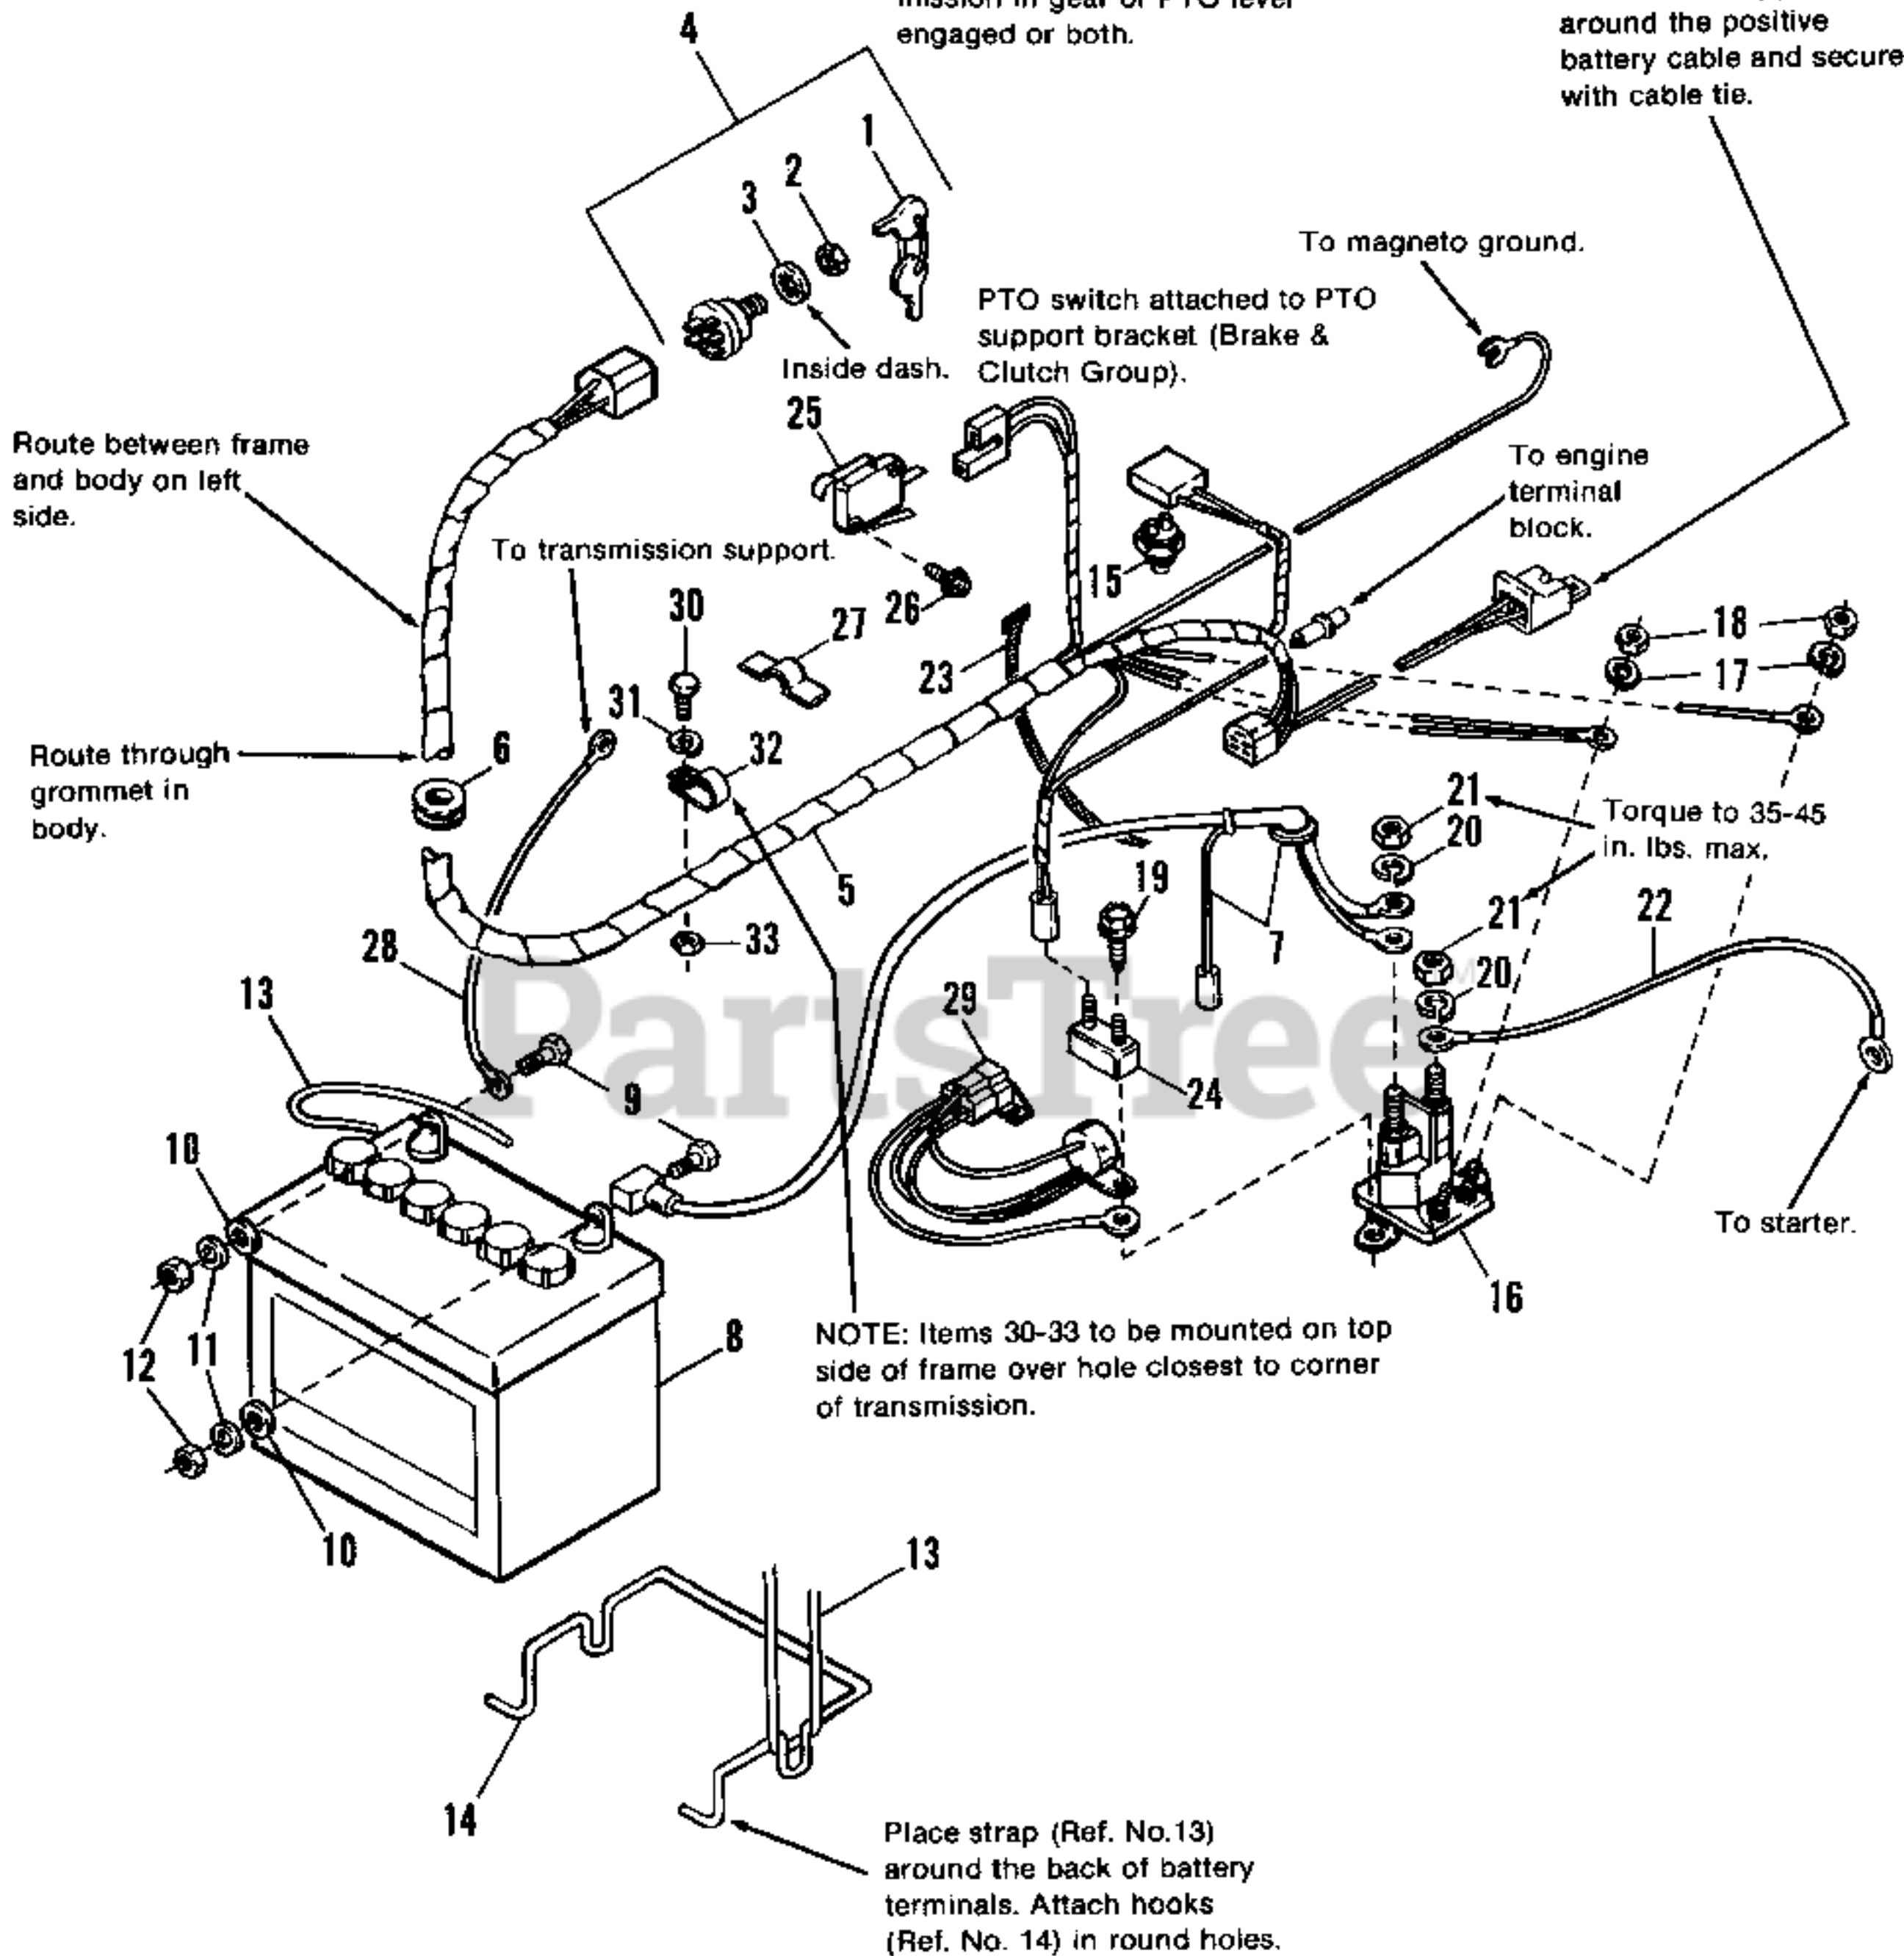

NOTE: Use standard hardware torque spec. chart unless otherwise noted.