


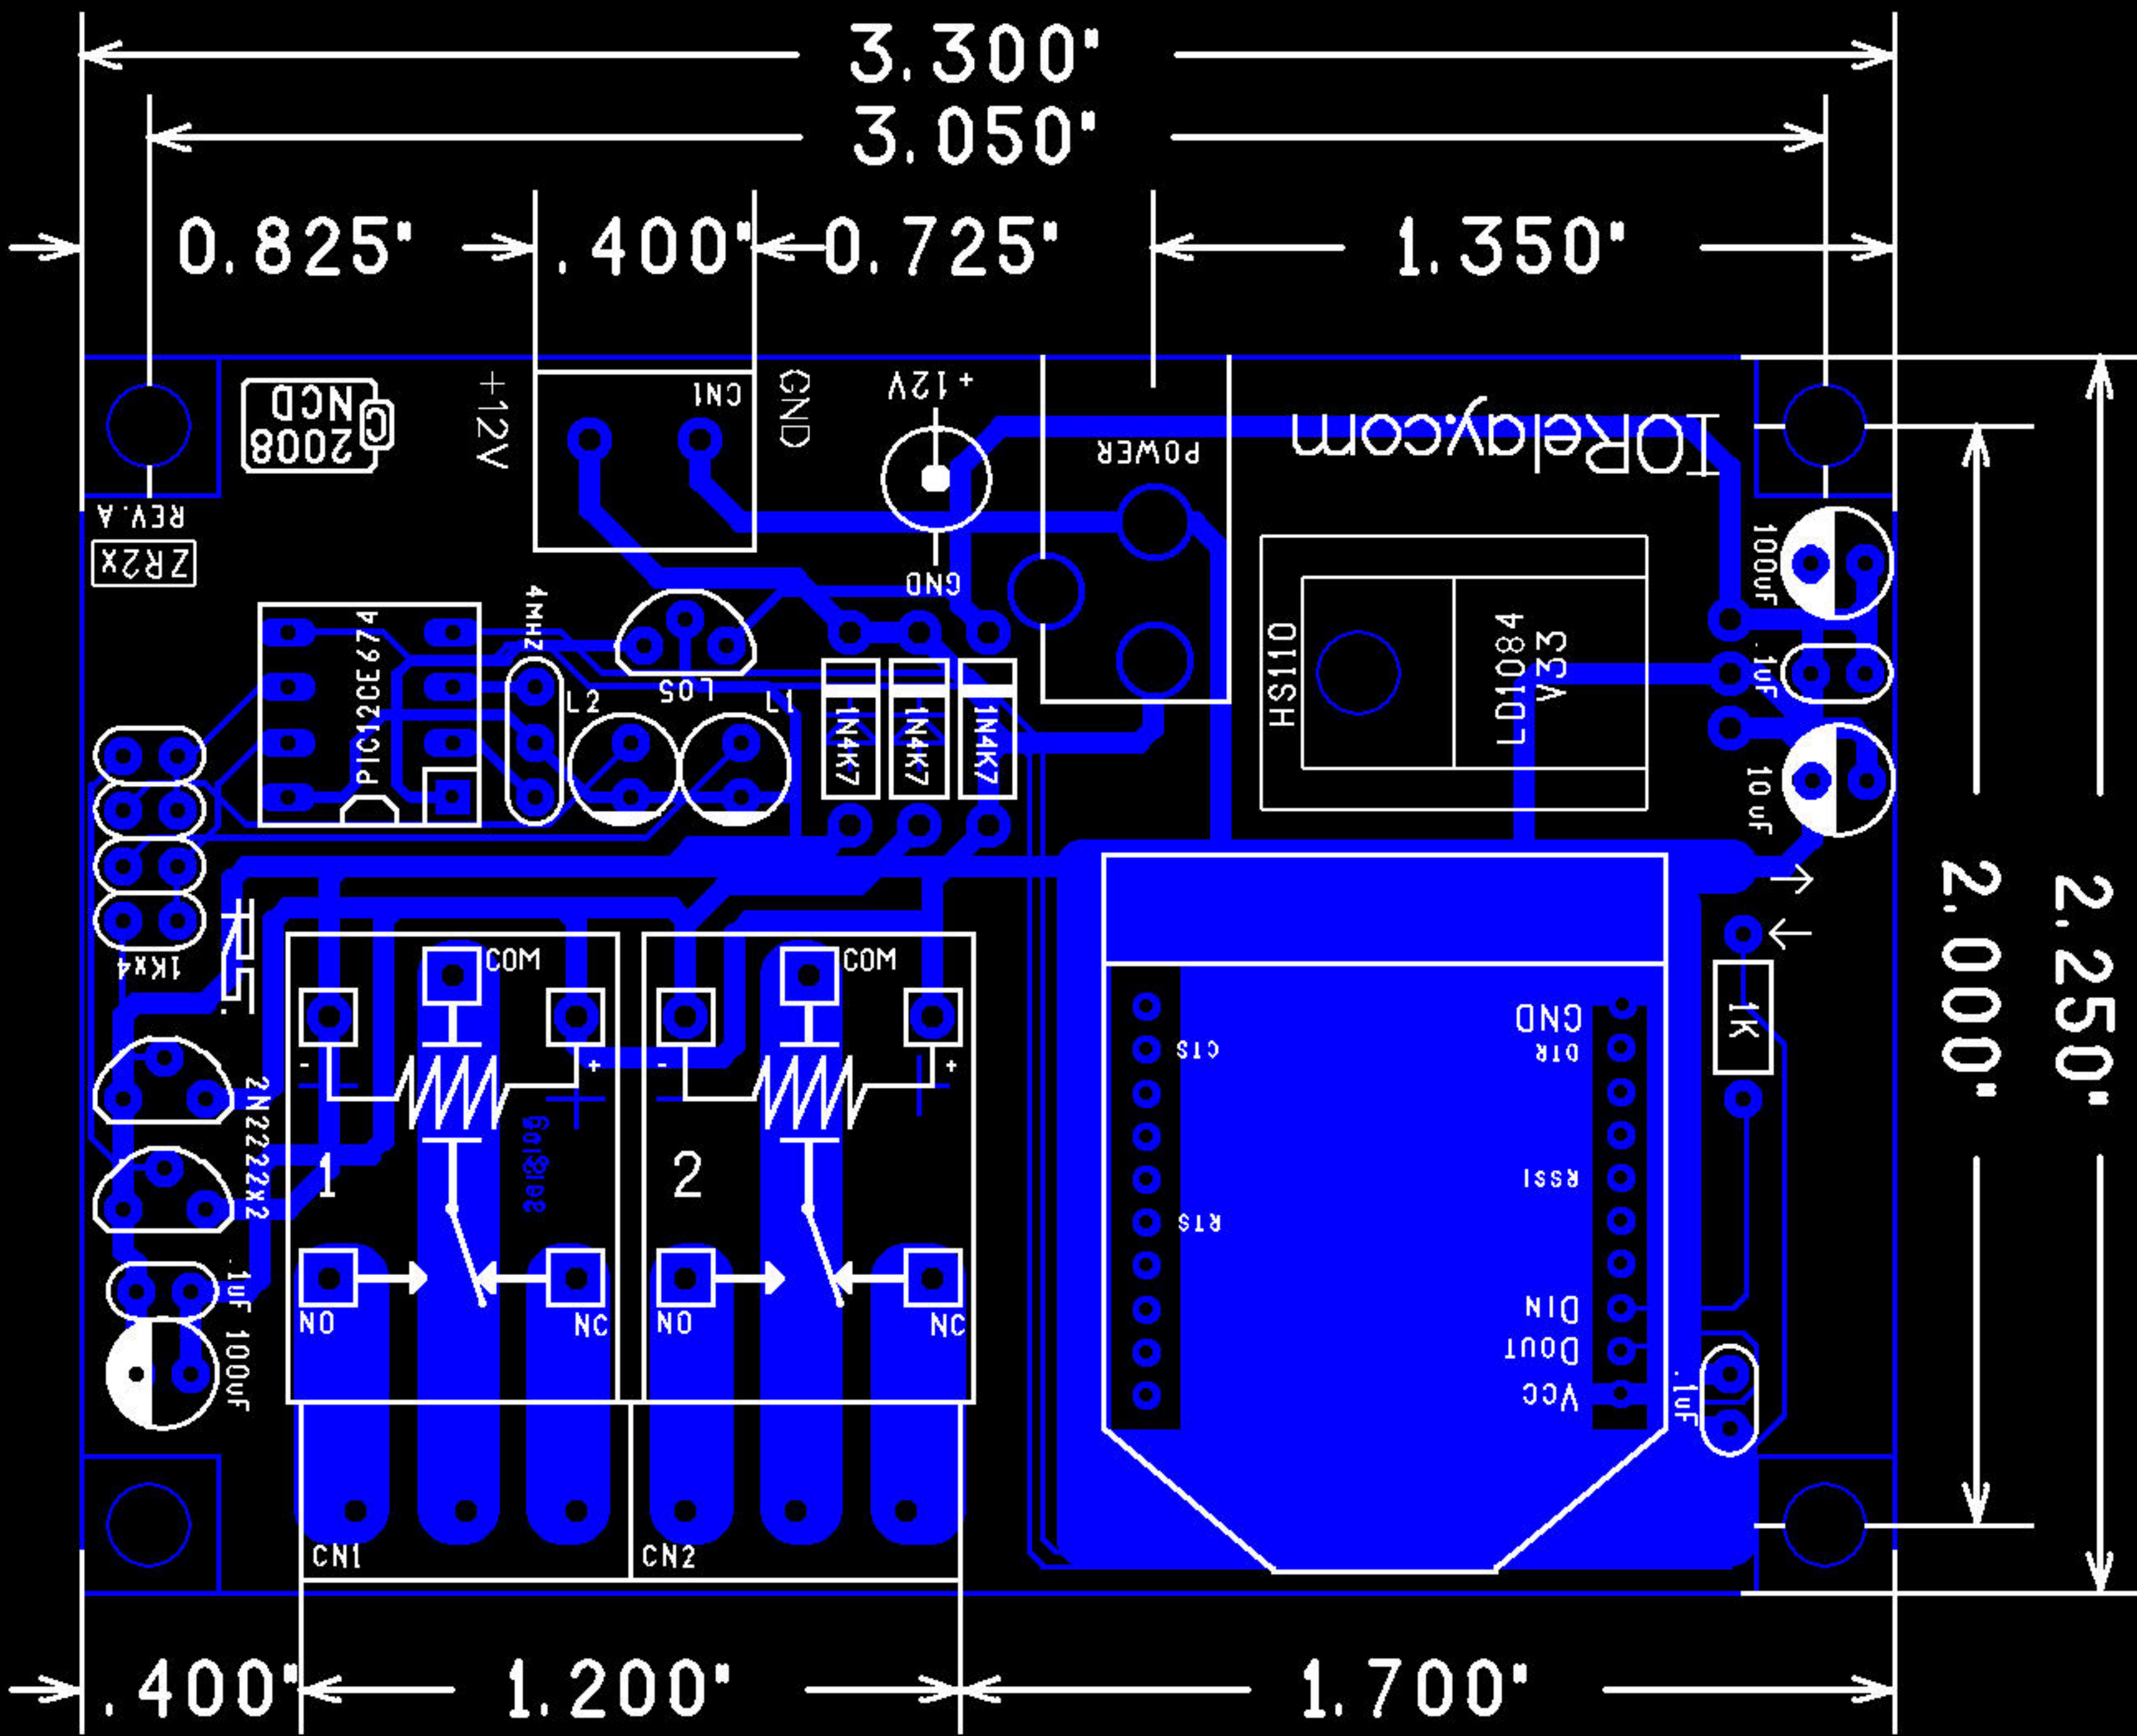

USE NO.8 SCREW
ALLOW 1.25" MIN. TOP CLEARANCE
USE MIN. 1/4" STANDOFF