

AT LEAST $\frac{1}{4}$ OF POSITIVE MOMENT
REINFORCEMENT TERMINATED WITH
ACI STANDARD HOOK

AT LEAST $\frac{1}{6}$ OF NEGATIVE MOMENT REINFORCEMENT
CONTINUOUS

AT LEAST $\frac{1}{4}$ OF POSITIVE MOMENT REINFORCEMENT
CONTINUOUS

ACI STANDARD HOOK

$0.25L$

40mm
CL.

$0.3L$ or $0.3L_1$
GREATER

$0.3L$ or $0.3L_1$
GREATER

STIRRUPS

$0.125L$

$0.125L$


L_1

$L = \text{CLEARSPAN}$

150mm

50mm
CLEAR

PERIMETER BEAM

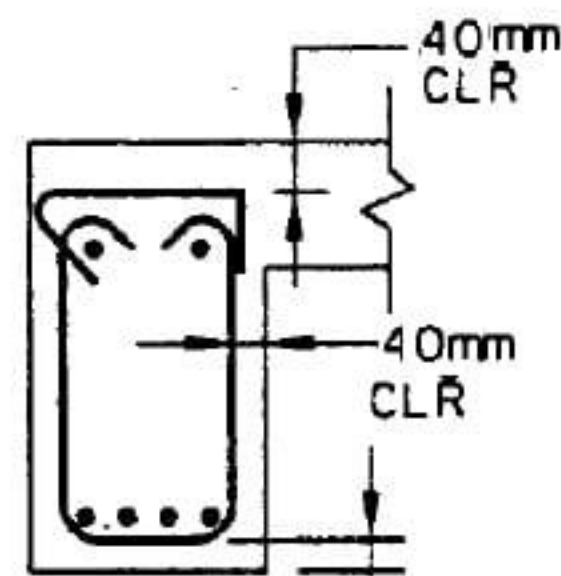

40mm CLR
UNDER STIRRUPS
SEC. C-C