


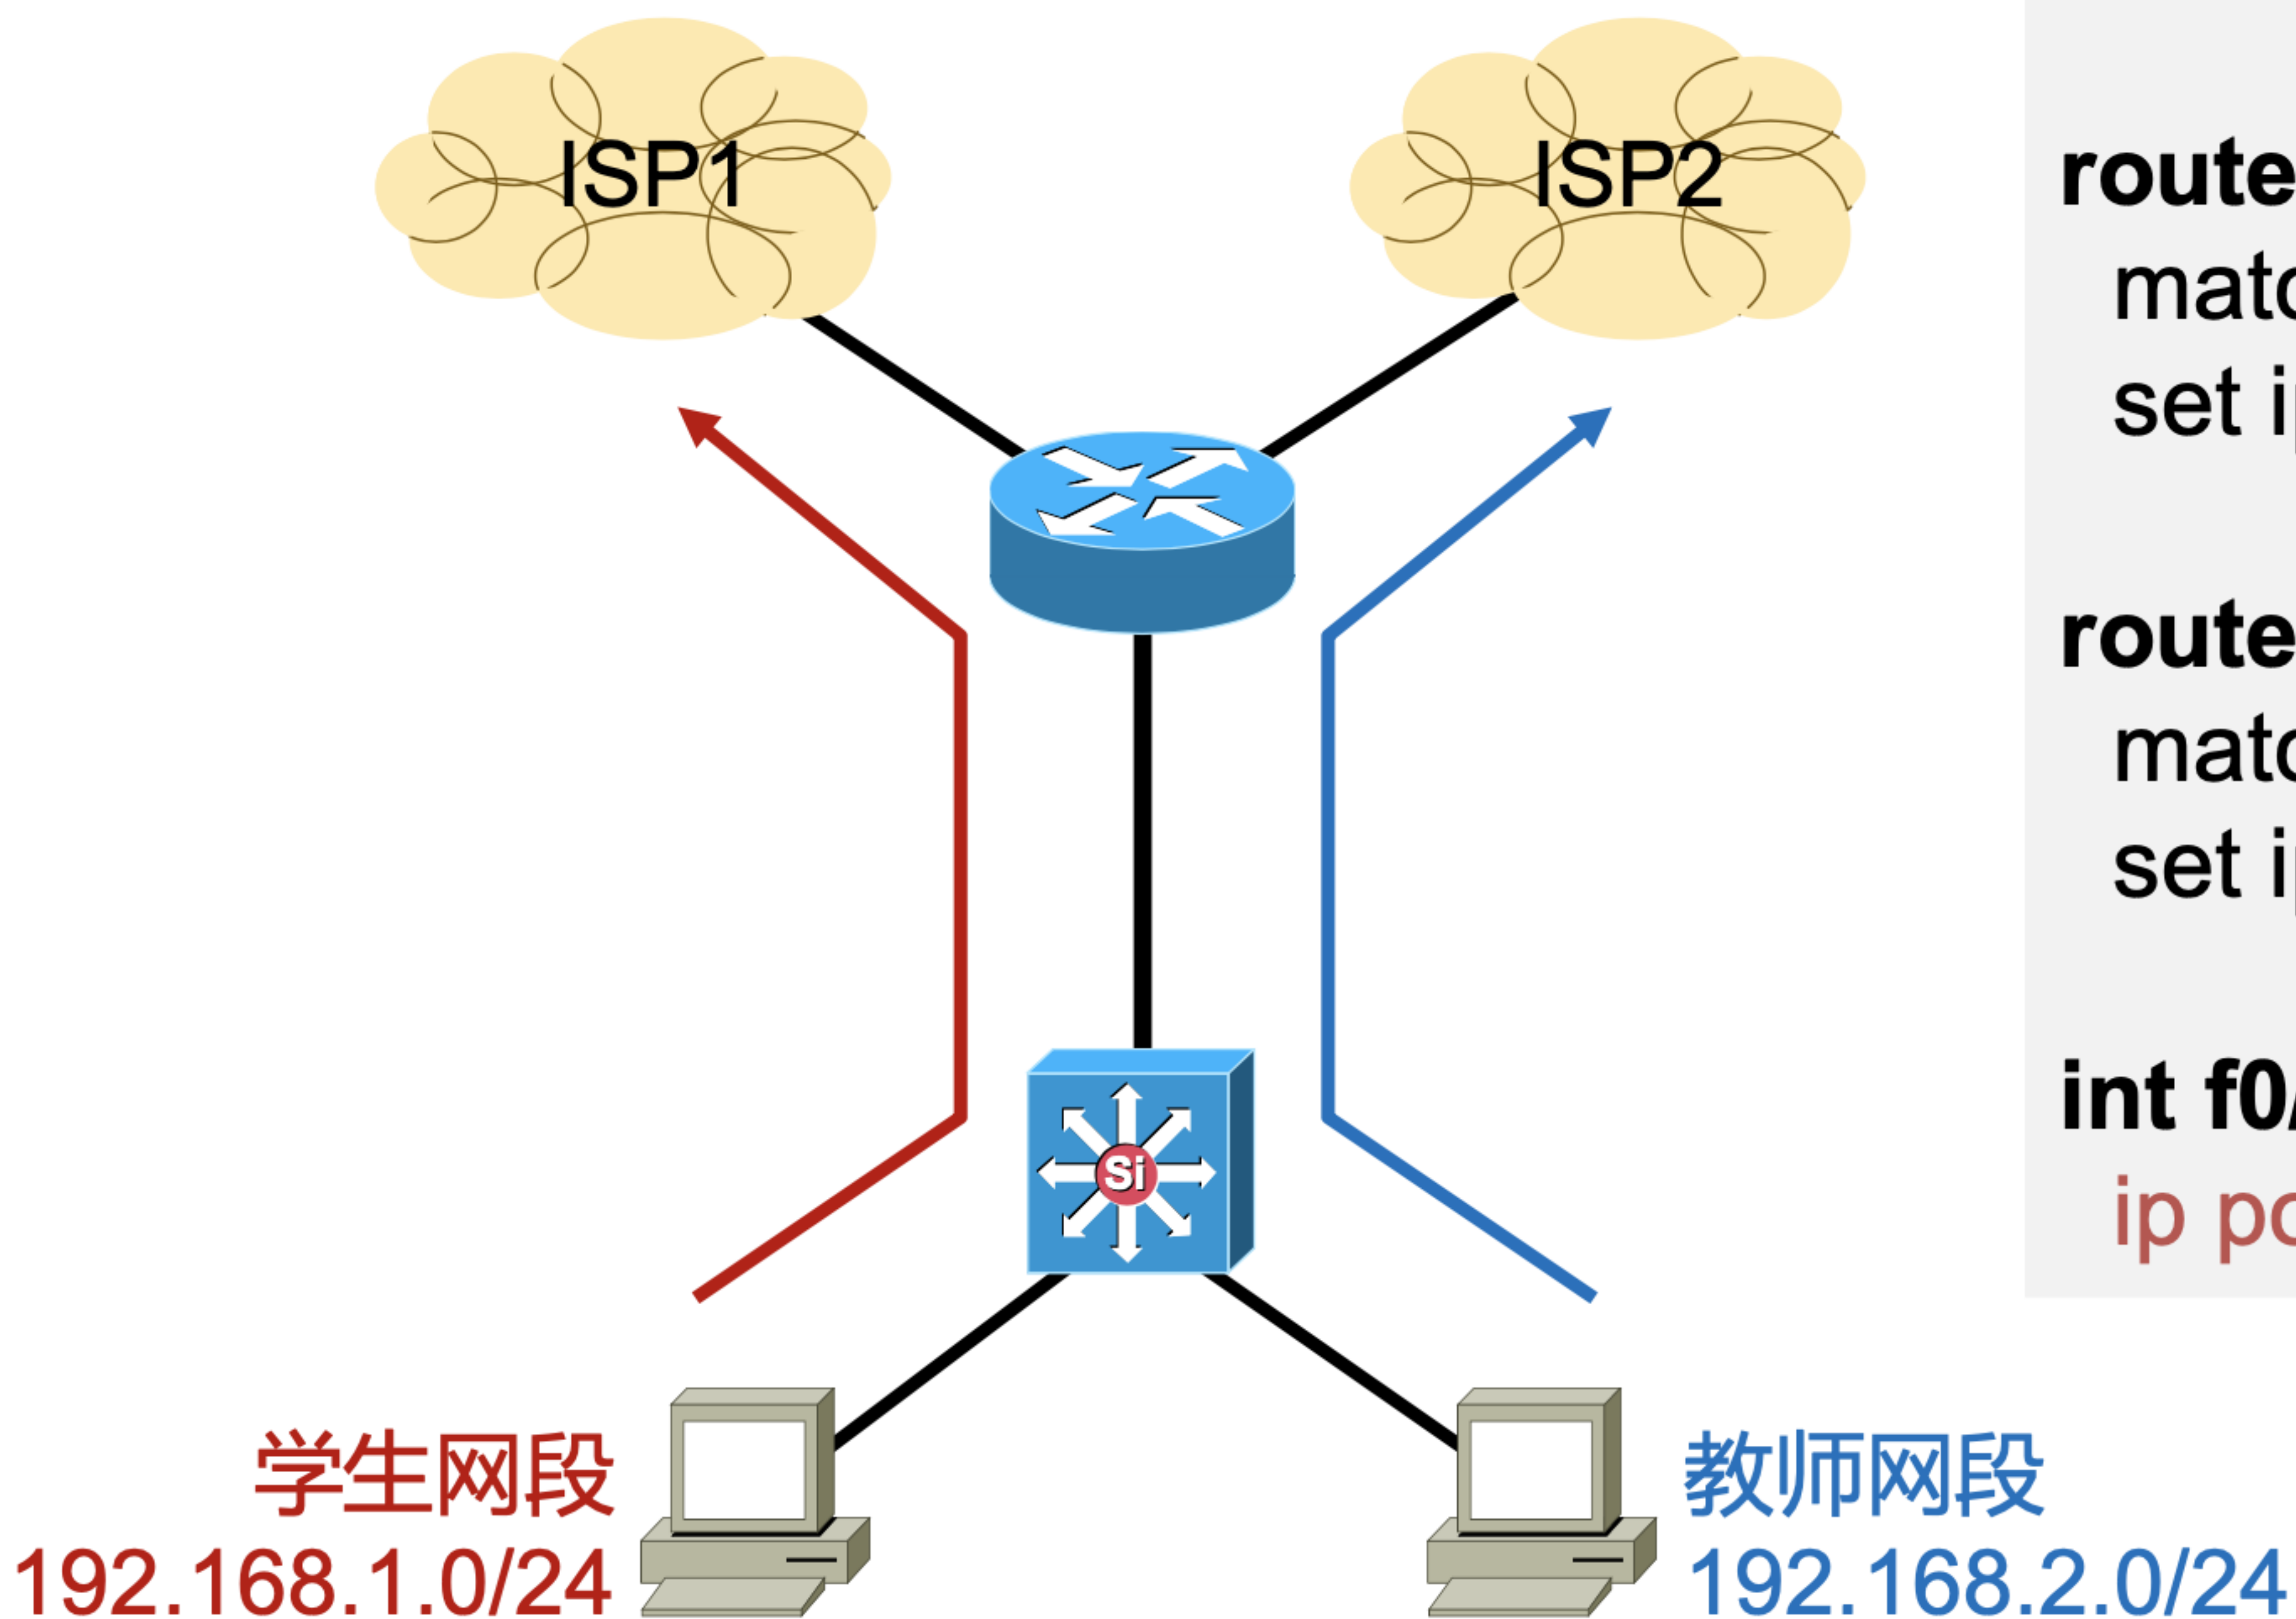

```
access-list 1 permit 192.168.1.0 0.0.0.255
access-list 2 permit 192.168.2.0 0.0.0.255
```

```
route-map test permit 10
match ip address 1
set ip next-hop ISP1的下一跳地址
```

```
route-map test permit 20
match ip address 2
set ip interface ISP2的下一跳地址
```

```
int f0/0
ip policy route-map test
```